
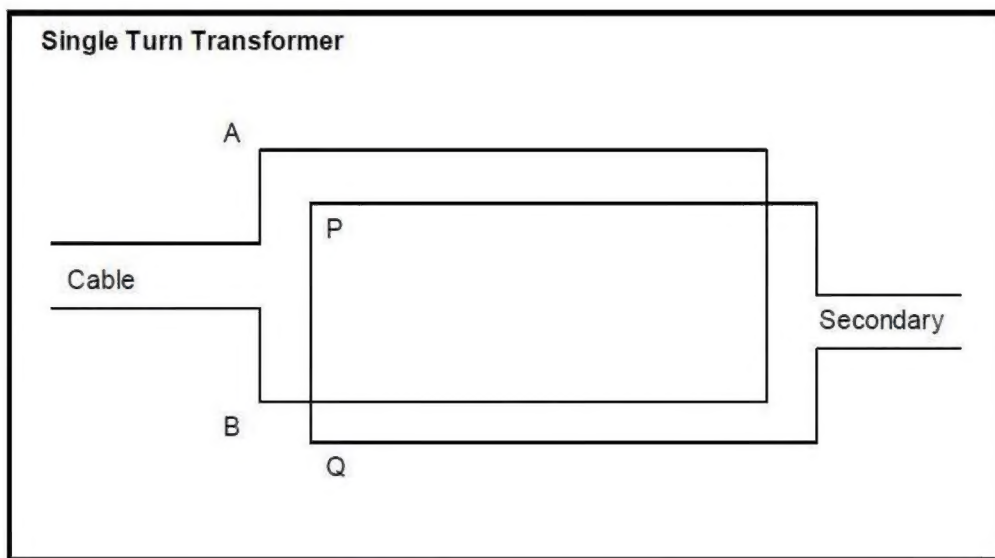


Two Turn Inductor, One Turn Transformer Derivation of Reflection and Transmission Coefficients

By Mike Gibson and Ivor Catt, June 1986

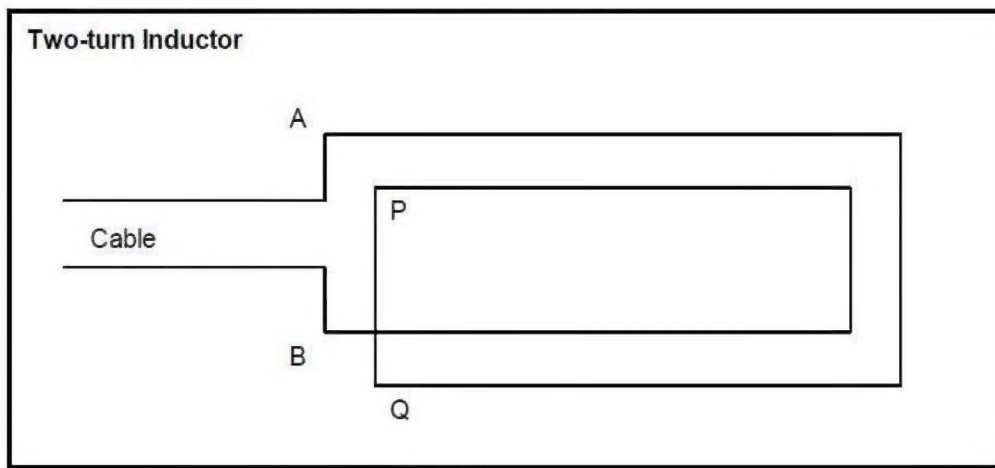

Here is a description of the symbols used in the derivations:

V_{FC} voltage on cable moving towards the inductor

V_{RC} voltage on cable moving away from the inductor

Navigation

[Welcome](#)
[Catt-Question](#)
[Electromagnetic Theory](#)
[Discussion of the new theory](#)
[Energy Current](#)
[Newcomer to my theory](#)
[Battery and Resistor](#)
[Fundamentals of](#)
[Electromagnetic](#)
[Energy Transfer](#)
[The](#)
[Reciprocating Capacitor](#)
[The new model for a charged capacitor](#)
[Two Turn Inductor, One Turn](#)
[Transformer](#)
[Derivation of Reflection and](#)
[Transmission Coefficients](#)

Z_C characteristic impedance of the cable
 V_{FE} voltage traveling in the forward direction in the even mode
 V_{FO} voltage traveling in the forward direction in the odd mode
 V_{RE} voltage traveling in the reverse direction in the even mode
 V_{RO} voltage traveling in the reverse direction in the odd mode
 Z_E characteristic impedance of even mode
 Z_O characteristic impedance of odd mode
 V_{FS} secondary voltage moving away from the transformer
 V_{RS} secondary voltage moving towards the transformer

[Crosstalk](#)
[\(Noise\) in](#)
[Digital Systems](#)
[Books](#)
[Publications](#)

Going from the cable to the inductor, the following basic equations hold,

$$\begin{aligned}
 1) \quad & V_{FC} + V_{RC} = V_{FE} + V_{FO} = V_{AB} \\
 2) \quad & I_{FC} + I_{RC} = I_{FE} + I_{FO} = I_{AB} \\
 3) \quad & V_{FE} - V_{FO} = V_{PQ} = 0
 \end{aligned}$$

Transforming (2) into voltages gives,

$$4) \quad \frac{V_{FC}}{Z_C} - \frac{V_{RC}}{Z_C} = \frac{V_{FE}}{Z_E} + \frac{V_{FO}}{Z_O}$$

Multiplying through by Z_C and defining new terms for the resulting ratios yields,

$$5) \quad V_{FC} - V_{RC} = r_E V_{FE} + r_O V_{FO}$$

$$6) \quad \boxed{r_E = \frac{Z_C}{Z_E} \quad r_O = \frac{Z_C}{Z_O}}$$

From (1),

$$7) \quad V_{RC} = V_{FE} + V_{FO} - V_{FC}$$

Substituting (7) into (5) and gathering terms,

$$7) \quad V_{FC} - V_{FE} - V_{FO} + V_{FC} = r_E V_{FE} + r_O V_{FO}$$